

FBA212-BS BALL VALVE







ABOUT FLAPCON Company Profile

As a Flapcon Family;

Based on our knowledge and experience gained in the field of valves and automation for over 17 years, we meet customer needs with the best solution applications. Flapcon was established in 2017 to meet the valve and actuator needs of industrial users with accurate, timely and highest quality solutions.

Flapcon was established to bring industrial valves - actuators and automation technology equipment together with industrial users. We produce high quality solutions in the design, manufacturing and sales of manual and automatic process valves for all industry areas. With our comprehensive technical knowledge and experienced staff, we produce solutions for our customers to meet most valve and actuator requirements.

We aim to be a constantly preferred brand thanks to our high quality products compiled according to the needs of the processes and our competitive pricing policy.

Our products; It is used in nearly every industry including Oil & Gas, Refining, Petrochemical, Chemical Processing, Pulp & Paper, Mining, Transportation, Food & Beverage, Pharmaceutical, Marine, HVAC, Drinking and Wastewater treatment and more.


Kind Regards

FLAPCON VALVES & AUTOMATION SYSTEMS CO. LTD.



FBA 212-BS (Short Pattern) SERIES BALL VALVES Performance Features

- High-tech bodies cast with precision casting technique are processed with high-precision CNC machines.
- B Lever operation for manual use
- C Superior performance with blow-proof plate spring pressure system
- D V-Ring sealing system made of PTFE material

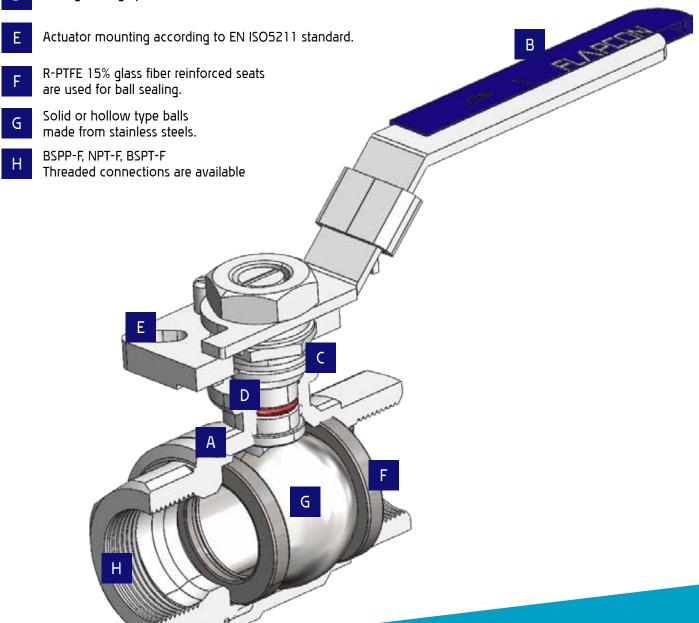



FBA 212-BS (Short Pattern) SERIES BALL VALVES Technical Literature

A - Body

FBA212-BS Series ball valves have a three pieces construction with investment castings.

B - Body

FBA212-BS series ball valves are produced with lever control as standard and are not compatible with actuator use.

D - V-Ring System

Packings with a V-shaped bearing create a concentric coating under the pressure of the plate spring. This increases the adhesion of the gasket to the body, preventing leakage.

E - Top Flange

FBA212-BS Series ball valves are produced with lever control as standard and are compatible with EN ISO5211 top flange to actuator use.

G - Ball

Balls are manufactured from solid stainless steel up to DN32 as standard. Larger diameters are manufactured as hollow. However, all balls can be manufactured as solid upon request.

H - Ends

FBA212-BS series ball valves are manufactured with BSPP, NSP, BSPT female threaded connections.

C - Plate Springs

The plate spring system ensures shaft sealing by applying constant pressure to the shaft. The plate springs provide constant pressure to the Teflon sealing unit located in the shaft neck. Additionally, a gland maintains this pressure, eliminating the risk of explosion. An anti-static device is available upon request.

F - Ball Seats


Teflon materials reinforced with 15% glass fiber reinforcement are machined with high precision on CNC machines. When the housing covers are tightened with bolts, these seats fit perfectly onto the ball surface. As pressure increases, sealing is achieved.

SPECIFICATIONS	DESCRIPTIONS
Dimensions	DN8 ~ DN100 (NPS 1/4" ~ NPS 4")
Pressure Class	PN 63 (913 PSI)
Vacuum	-760 mm/HG
Temperature Ratings	-25 °C ~ +180 °C (-13 °F ~ 356 °F)
Face to Face	Short pattern
Materials	Investment casting for body & caps



FBA 212-BS (Short Pattern) SERIES BALL VALVES Part List


TIA TO CO

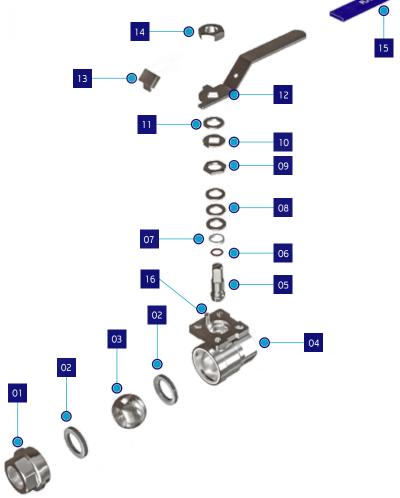


ITEM	PART NAME	MATERIALS	QTY'S	ITEM	PART NAME	MATERIALS	QTY'S
01	Side Body	WCB/CF8/CF8M/CF3M	1	09	Nut	AISI304	1
02	Seat	R-PTFE	1	10	Position Stopper	AISI304	1
03	Ball	CF8/CF8M/CF3M	1	11	Washer	AISI304	1
04	Body	Body Sealing	1	12	Lever	AISI304	1
05	Stem	CF8/CF8M/CF3M	2	13	Lock Device	AISI304	1
06	O-Ring	FKM	1	14	Nut	AISI304	1
07	Packing	PTFE	1	15	Sleeve	Plastic	1
08	Plate Springs	AISI304	3	16	Stop Pin	AISI304	1




FBA 212-BS (Short Pattern) SERIES BALL VALVES Technical Drawing



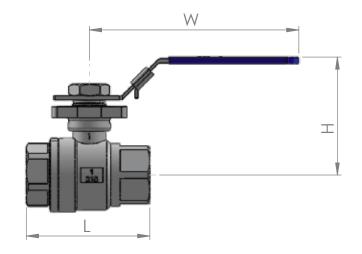








FBA 212-BS (Short Pattern) SERIES BALL VALVES Dimensions in "mm"

DN	NPS	d	L	Н	W	TI	T2	S	Nm	Kgs (Hollow / Solid)
8	1/4"	6	56	65	115	F03	-	9X9	5	0.37
10	3/8"	10	56	65	115	F03	-	9X9	5	0.35
15	1/2"	15	57	65	117	F03	F04	9X9	5	0.37
20	3/4"	20	64	70	117	F03	F04	9X9	8	0.49
25	1"	25	77	75	134	F04	F05	11X11	10	0.74
32	1-1/4"	32	90	85	134	F04	F05	11X11	14	1.18
40	1-1/2"	40	105	95	203	F05	F07	14X14	18	1.94 / -
50	2"	50	125	105	203	F05	F07	14X14	25	2.90 / -
65	2-1/2"	65	153	140	255	F07	F10	17X17	48	5.77 / -
80	3"	80	172	145	255	F07	F10	17X17	75	8.45 / -
100	4"	100	221	175	302	F07	F10	17X17	110	15.60 / -

DN	NPS	Cv	Kv (m³/h)	Kgs (Hollow)
15	1/2"	40.80	35.00	-
20	3/4"	53.70	46.00	-
25	1"	84.00	72.00	-
32	1-1/4"	122.50	105.00	-
40	1-1/2"	198.40	170.00	1.94
50	2"	320.90	275.00	2.90
65	2-1/2"	591.70	507.00	5.77
80	3"	1056.10	905.00	8.45
100	4"	1650.10	1414.00	15.60

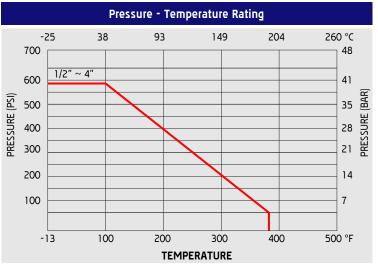

more than Flow Control **Authorized Distributor** FLAPCON FLAPCON VALVES & AUTOMATION SYSTEMS CO. LTD. TEL: +90(216) 660 10 26 FAX: +90(216) 660 10 27 E-MAIL: INFO@FLAPCON.COM